SPECIFICATION

Current Rate:1 AMP
Insulation Resistance:1000M Ω Min
Contact Resisitance:30m Ω Max
Dielectric voltage:600V AC for one minute
Operation Temperature:-50°C to +105°C
Soldering Temperature:200°C / 5 Sec

MATERIAL

Insulator:Hi-temp PBT. UL 94V-0
Contact material:Phorphos Bronze Jis 5210
contact Platred:150U" tin over 40U" nickel

ORDER INFORMATION

D	P	L	C	C	-	X	X	T	B	-	L

◎:Standard Recommend

- XX: No. of contacts
- T: T:Tin plated
- B: B:PBT/Black
- L: U:RoHS + P.B.T

certified Pb RoHS Compliant

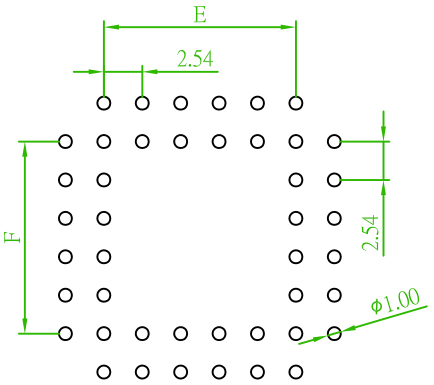

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

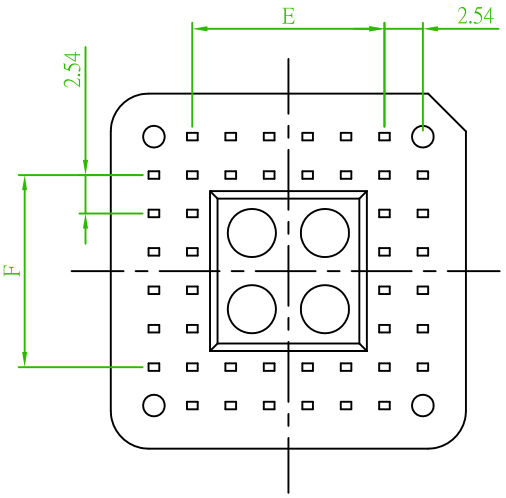

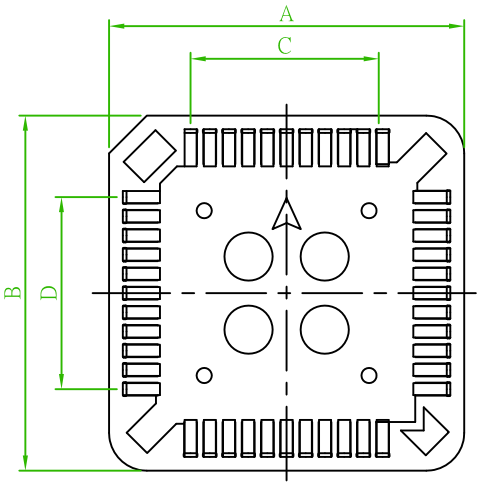

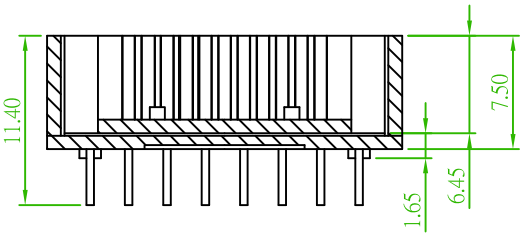

No. of conatcst	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.60	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.66	31.66	20.32	20.32	20.32	20.32
84	36.66	36.66	25.40	25.40	25.40	25.40

AREA	REV.	DESCRIPTION	DATE

糧德企業有限公司
Amtek Technology Co., Ltd.
TEL:886-2-2268-8036
FAX:886-2-2268-8035

品 名 TITLE	PLCC SOCKET THROUGH HOLE TYPE				
品 號 PART NO.	DPLLC-XX-L			日 期 DATE	08/08/2005
圖 號 DRAWING NO.	DPLCC-XX-L	版 本 REV.	B	繪 圖 DRAWN	Kent
客戶品號 CUSTOMER P/N		比 例 SCALE	FREE	核 對 CHECKED	Paul
公 差 TOLERANCE	.X ±0.3 .XX ±0.25	單 位 UNIT	mm	核 准 APPROVED	James