

1

2


3

4






5

Material:
 Housing:Nylon 6T
 Actuator:PPS
 Contact:Phosphor Bronze
 Leg:Phosphor Bronze
 Plating:02:Gold flash over 45u" Min. Nickel
 20:100u" Tin/Lead(9:1) over 45u"
 Min. Nickel

Electrical:
 Current Rating:0.5A
 Voltage Rating:50V DC
 Contact Resistance:20m Max.
 Insulator Resistance:1000M Min.
Environmental:
 Temperature Range:-20°C~+85°C

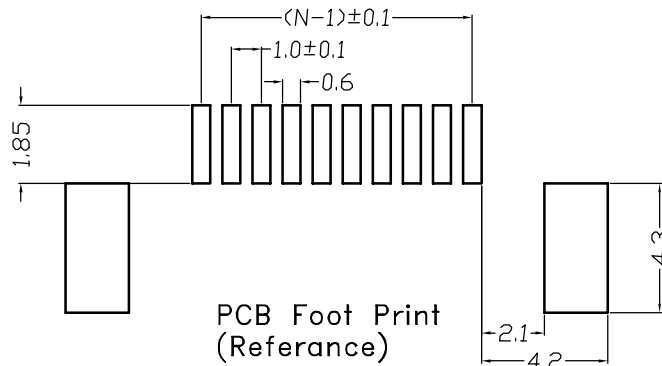

Circuits	A	B	C	Circuits	A	B	C
4	3.0	5.1	11.4	28	27.0	29.1	35.4
5	4.0	6.1	12.4	29	28.0	30.1	36.4
6	5.0	7.1	13.4	30	29.0	31.1	37.4
7	6.0	8.1	14.4	31	30.0	32.1	38.4
8	7.0	9.1	15.4	32	31.0	33.1	39.4
9	8.0	10.1	16.4	33	32.0	34.1	40.4
10	9.0	11.1	17.4	34	33.0	35.1	41.4
11	10.0	12.1	18.4	35	34.0	36.1	42.4
12	11.0	13.1	19.4	36	35.0	37.1	43.4
13	12.0	14.1	20.4	37	36.0	38.1	44.4
14	13.0	15.1	21.4	38	37.0	39.1	45.4
15	14.0	16.1	22.4	39	38.0	40.1	46.4
16	15.0	17.1	23.4	40	39.0	41.1	47.4
17	16.0	18.1	24.4	41	40.0	42.1	48.4
18	17.0	19.1	25.4	42	41.0	43.1	49.4
19	18.0	20.1	26.4	43	42.0	44.1	50.4
20	19.0	21.1	27.4	44	43.0	45.1	51.4
21	20.0	22.1	28.4	45	44.0	46.1	52.4
22	21.0	23.1	29.4	46	45.0	47.1	53.4
23	22.0	24.1	30.4	47	46.0	48.1	54.4
24	23.0	25.1	31.4	48	47.0	49.1	55.4
25	24.0	26.1	32.4	49	48.0	50.1	56.4
26	25.0	27.1	33.4	50	49.0	51.1	57.4
27	26.0	28.1	34.4				

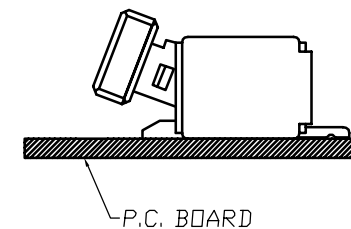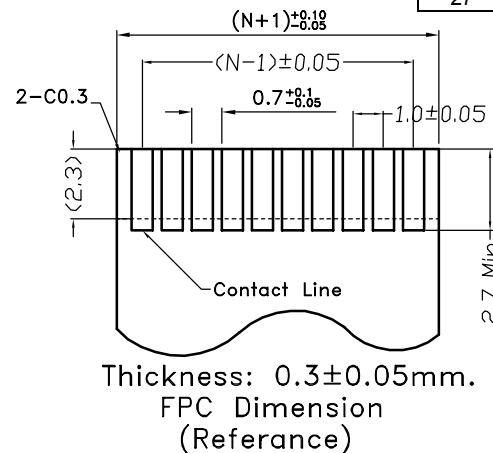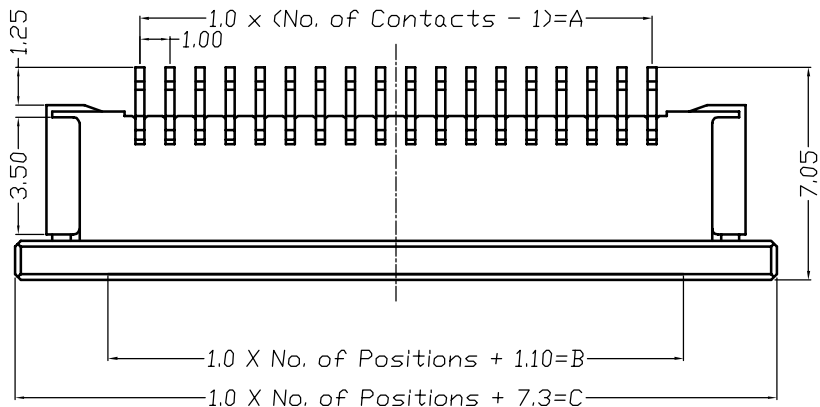

				DRAWN: Fred Qiu	GENERAL TOLERANCE: ±0.2	Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Mike Wu	UNIT: MM	DESCRIPTION: 1.0 FPC CONNECTOR BOTTOM CONTACT	
C	07-09-2002	223-XX-02(NEL)	Jerry Chen				
B	06-10-2002	223-XX-02(NEL)	Jerry Chen	APPROVED:	SCALE:	SIZE A4	
A	03-21-2002	223-XX-02(NEL)	Fred Qiu	Peter Huang			
REV	DATE	FILE	BY		SHEET: 1 / 1	PART NO: 1223-XX-02	
					PROJECTION:		