


# Ultimate Lithium (L92-FR03)

**AAA**




## Industry Standard Dimensions

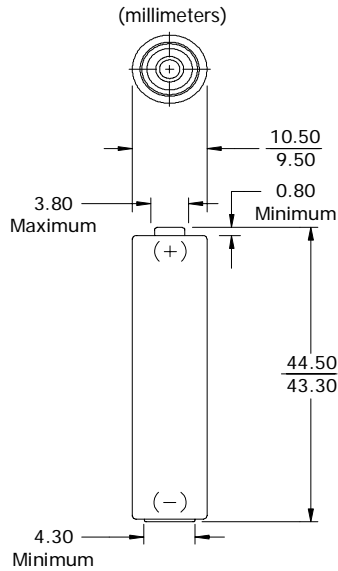


## Specifications

<b>Classification:</b>	Lithium
<b>Chemical System:</b>	Lithium/Iron Disulfide (Li/FeS <sub>2</sub> )
<b>Designation:</b>	IEC-FR03
<b>Nominal Voltage:</b>	1.5 Volts
<b>Storage Temp:</b>	-40°C to 60°C
<b>Operating Temp:</b>	-40°C to 60°C
<b>Typical Weight:</b>	7.6 grams
<b>Typical Volume:</b>	3.8 cubic centimeters
<b>Max Discharge:</b>	1.5 Amps Continuous 2.0 Amps Pulse (2 sec on/8 sec off)
<b>Typical Li Content:</b>	0.5 grams
<b>Shelf Life:</b>	15 years at 21°C (90% of rated capacity)
<b>Shipping:</b>	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185


## Milliwatt-Hours Performance

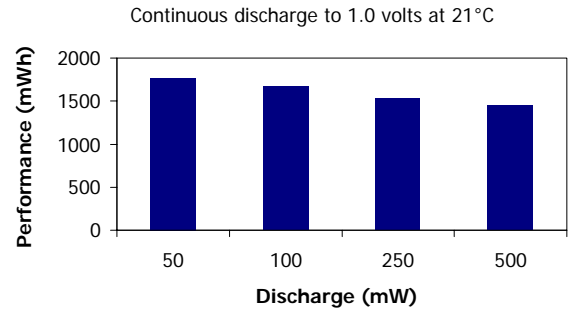


## Industry Standard Testing (21°C):

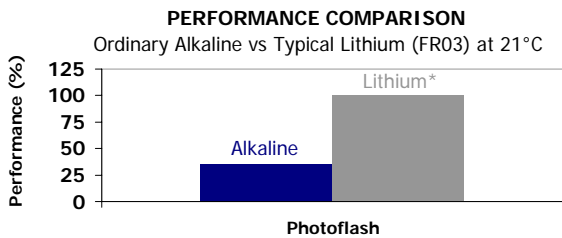

\* vs. ordinary alkaline

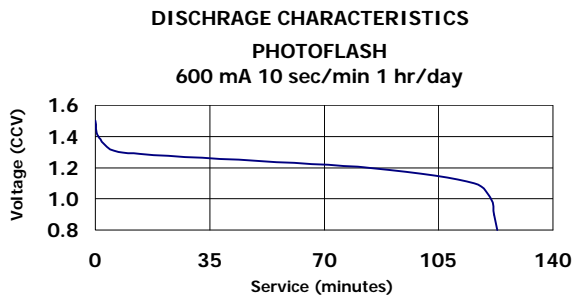

## Battery Selection Indicator

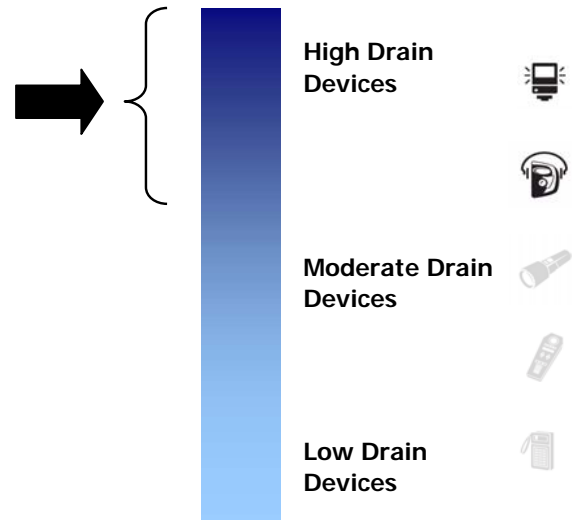

## Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.